



**NOTES:**

Rated Current: 0.75AMP  
 Contact Resistance: 30mΩ max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -40°C to +105°C





Contact Material: Brass  
 Contact Plating: Au Over Ni  
 Insulator Material: PA9T+30%G.F UL94V-0 BK

**Ordering Information**

1510-11 XX XX S 041 X 1

No. of Pins Contact Plating Pin Length Packing  
 01~50 G0=Gold Flash L=A+B+1.0 A=Tray  
 G3=10u"Gold Standard:041=4:1  
 G4=15u"Gold  
 G5=30u"Gold

Item	Pin Length	A	B
Standard	4.10	1.20	1.90
Alternate			

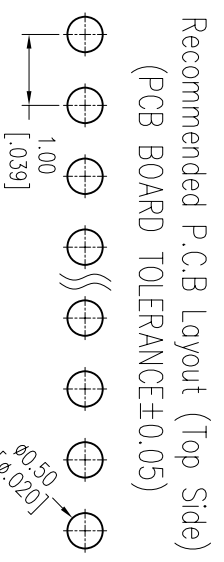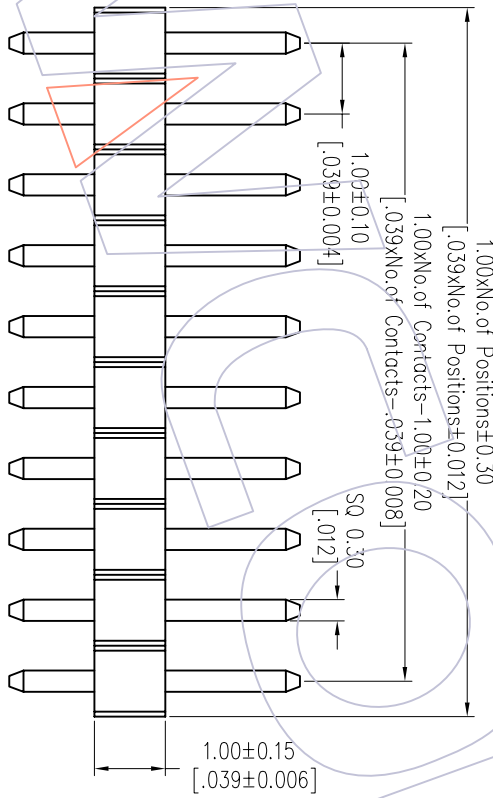

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE: PH1. 00 SINGLE ROW 180° H=1.0 Customer NO.	WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2012/03/01	NEW	-----	X.XXX Angle	JHuang	2012.11.20	Fit mm	1510-11XXXXXX			
A1	2012/11/20	Modify the material		X.XXX ±0.25	CHECK		A4				
A0	2012/03/01	NEW		X.XXX ±0.15	CHECK		A4				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIW	APPROVE	DATE	SHEET	PROJ.			
				TOL			1/1				



Http: www.wcon.com