HSF

NOTES:
Rated Current:1.0AMP
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V−0 BK

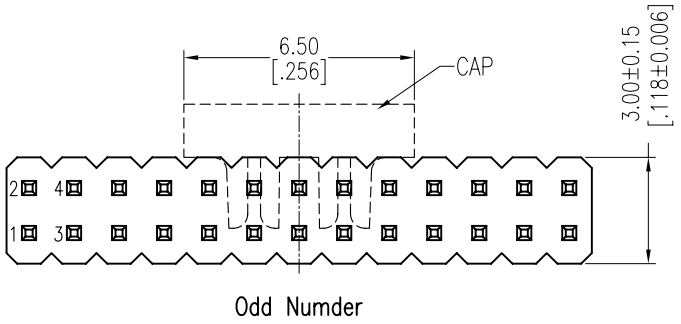

Odd Numder

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

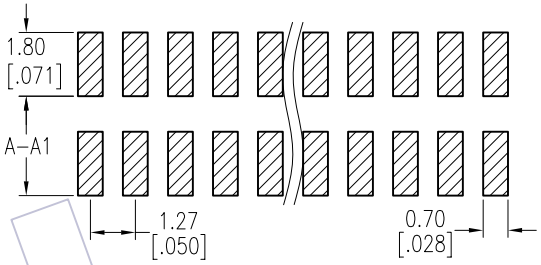

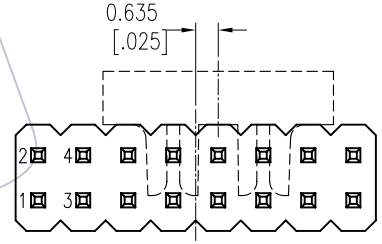

Dual Numders A1

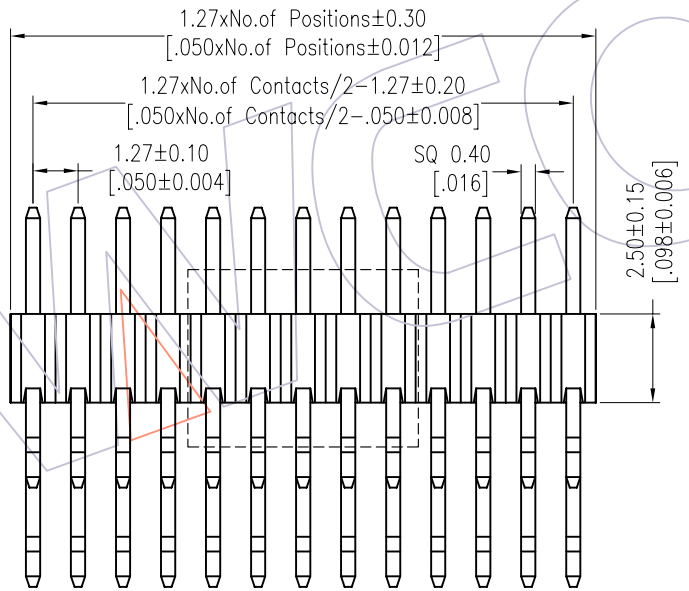

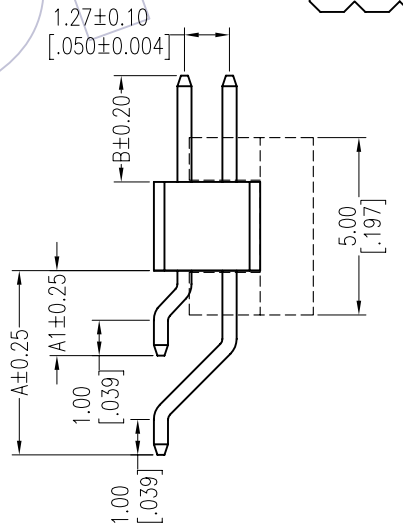

Ordering Information

1325-12 XX XX Z XXX X 1

No.of Pins Per Row:02~50	Contact Plating	Pin Length(Short)	Packing
	G0=Gold Flash	L=A1+B+2.8	A=Tray
	G3=10u"Gold	Standard:071=7.1	T=Tube
	G4=15u"Gold	082=8.2	P=Tube+CAP
	G5=30u"Gold	092=9.2	R=Tape&Reel+CAP
	S0=Gold Flash/Tin		
	S3=10u"Gold/Tin		
	S4=15u"Gold/Tin		
	S5=30u"Gold/Tin		

Item	Pin Lenght	A1	A	B	Mating
Standard	7.10	2.40	5.20	1.90	2321
	8.20	2.40	5.20	3.00	2334
	9.20	2.40	5.20	4.00	2344
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2013/06/07	Modify Drawing	------
A0	2012/03/31	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW: William Chen — DATE: 2013.06.07
CHECK — DATE
APPROVE — DATE

SCALE	Fit
UNIT	mm [inch]
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 1325-12XXXXZXXXXX
TITLE: PH1.27 DUAL ROW 90° SMT H=2.5
Customer NO.

WCON
Http: www.wcon.com
WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com
WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com