
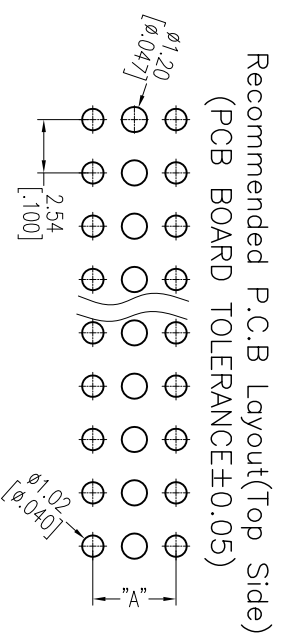


# HSP

**NOTES:**

Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: LCP+30%G.F UL94V-0


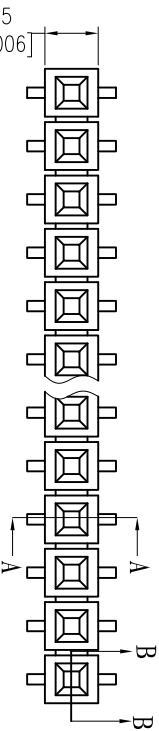


## Ordering Information

2185E - 1 XX W XX D U N T X

No. of Pins per Row: 02-40PIN  
 Contact Plating: GP=Gold Flash  
 G3=10μ"Gold  
 G4=15μ"Gold  
 G5=30μ"Gold  
 S0=Gold Flash/Tin  
 S3=10μ"Gold/Tin  
 S4=15μ"Gold/Tin  
 S5=30μ"Gold/Tin  
 SN=Tin  
 SM=Mate Tin

Packaging: T=Tube  
 Series No.:

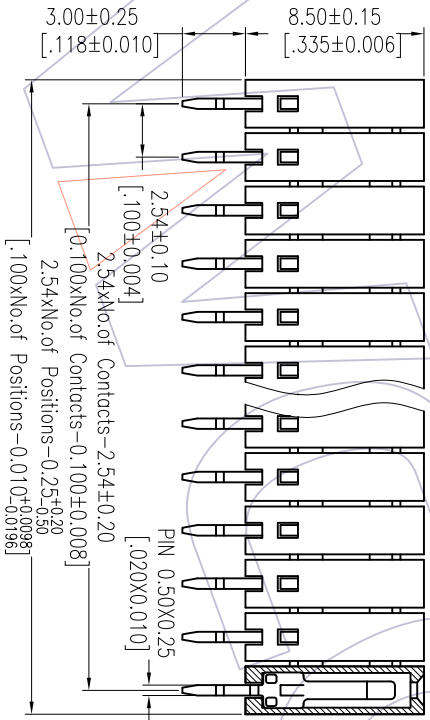

**SECTION: B-B**

Item	Pitch	Mating
Standard	2.54	1115/1120/1125
Alternate		

TITLE(DIM:A)	PART NO.
1=3.96	2185E-1XXWXXDUNX1
2=3.17	2185E-1XXWXXDUNX2
3=5.08	2185E-1XXWXXDUNX3

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2013/01/02	Modify Drawing	---	X.X	Wrong	2013/01/02	UNIT	mm	SEE TABLE
A0	2012/08/16	NEW	---	X.XXX	CHECK	DATE	SIZE	A4	TITLE: FH2.54 SINGLE ROW H-8.5 Provision Broken
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	1/1	Customer NO.
				DM	TOL		PROJ.		

# WCON

Http: [www.wcon.com](http://www.wcon.com)  
 WCON-Dongguan Tel: +86 769 85358920  
 WCON-Kunshan Tel: +86 512 57468408  
 Fax: +86 769 85358915 Fax: +86 512 57468468  
 E-mail: [sales@wcon.com](mailto:sales@wcon.com) E-mail: [sales@wcon.com](mailto:sales@wcon.com)