
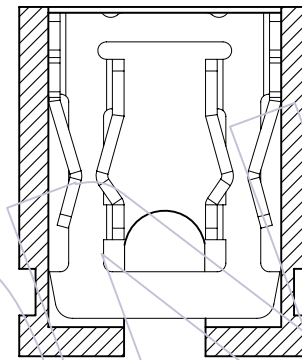


HSF



TECHNICAL SPECS:

Current Rating:3.0AMP
 Contact Resistance:20mΩ Max
 Insulation Resistance:1000MΩ Min
 Withstanding Voltage:1000V AC/Minute
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact plating:Au over Ni
 Insulator Material:PBT+30%G.F(UL94V-0)

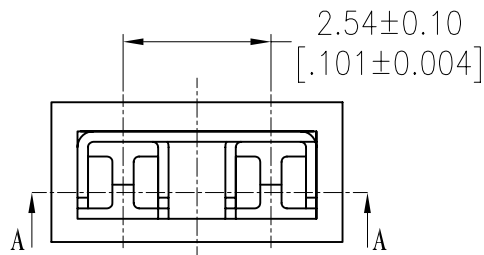

SECTION A-A

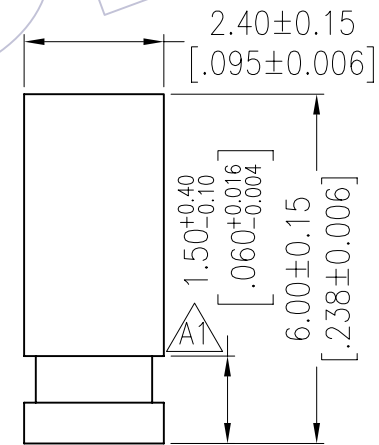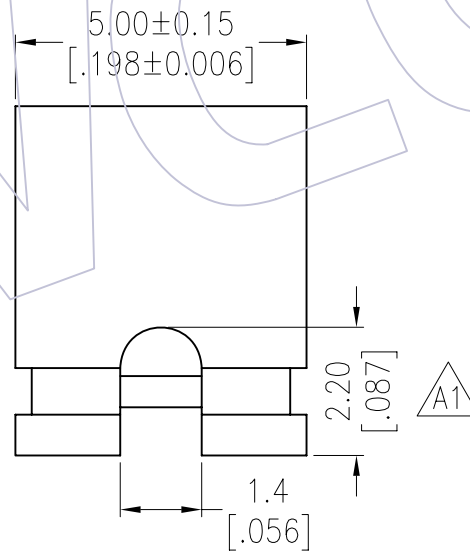

Ordering Information

3710 - 60 01 O XX X 0 1

Housing shape
O=Open

Contact Plating
S0=Gold Flash/Ni

Colour
B=Black (Std)
R=Red
N=Green
U=Blue
Y=Yellow

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2013/01/11	2.5--2.20,1.50--1.50±0.10	-----	X.X ±0.40	JYHuang	2013/01/11	UNIT	mm	3710-60010XXX01
A0	2012/12/10	NEW	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.54mm MINI JUMPER OPEN TYPE H=6.0
				X.XXX ±0.15			SHEET	1/1	Customer NO.
				Angle ± 3'	APPROVE	DATE	PROJ.		
				DIM TOL					

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: salesks@wcon.com